

**CRYSTAL OSCILLATOR SPECIFICATION**

This specification defines the operating characteristics of an ovenized crystal oscillator. Long term stability is assured through use of premium components.


REV.	DESCRIPTION OF REVISION	DWN. BY	APV. BY	DATE
-		JTL	TST	08-24-2011

1. OUTPUT(PIN = "R.F. OUTPUT")

- 1.1. Frequency 13.000000 MHz
- 1.2. Initial Accuracy <  $\pm 2 \times 10^{-7}$ 
  - a. @ Temperature +25  $\pm 1^\circ\text{C}$
  - b. After time on power 30  $\pm 5$  minutes
  - c. Within time period following date code  $\leq 90$  days
  - d. @ VCO Input voltage +2.0  $\pm 0.001$  V
- 1.3. Waveform Rectangular
- 1.4. Level HCMOS
  - a. "1" level >  $V_{cc} - 0.5$  V
  - b. "0" level < +0.5 V
- 1.5. Load 15 pF
- 1.6. Duty cycle 45% to 55% @ +2.5 V
- 1.7. Spurious < -60 dBc

2. FREQUENCY STABILITY

- 2.1. Ambient <  $\pm 1 \times 10^{-8}$ ,  $0^\circ\text{C}$  to  $+70^\circ\text{C}$   
(referenced to  $+25^\circ\text{C}$ )
- 2.2. Aging
  - a. At time of shipment <  $\pm 1 \times 10^{-9}$ /day
  - b. After indefinite storage
    - i. Daily <  $\pm 1 \times 10^{-9}$  after 30 days
    - ii. Yearly <  $\pm 1 \times 10^{-7}$
    - iii. 10 years <  $\pm 4 \times 10^{-7}$
- 2.3. Voltage <  $\pm 2 \times 10^{-9}$ /±5% change
- 2.4. Short term <  $5 \times 10^{-11}$ / second  
root Allan variance
- 2.5. Load <  $\pm 2 \times 10^{-9}$ /±10% change
- 2.6. Warm-up <  $\pm 5 \times 10^{-8}$  in 5 minutes @ +25  $\pm 1^\circ\text{C}$   
(referenced to 1 hour)
- 2.7. Phase Noise
  - a. @ 10 Hz < -115 dBc
  - b. @ 100 Hz < -130 dBc
  - c. @ 1 kHz < -140 dBc
  - d. @ > 10 kHz < -150 dBc


 OUR PERFORMANCE YOUR REPUTATION	MODEL NO.	PAGE OF TOTAL		DWG. NO.	REV.
	OCXO 145-1001	1	2	114-1479	-

- 3. ELECTRICAL FREQUENCY ADJUSTMENT (PIN = "VCO INPUT")
  - 3.1. Range
    - >  $\pm 8 \times 10^{-7}$
    - <  $\pm 2.4 \times 10^{-6}$


Referenced to frequency at nominal Center Voltage
  - 3.2. Control
    - 0 to +4 V
  - 3.3. Slope
    - Positive
  - 3.4. Center Voltage
    - +2 V

NOTE: When not connected, VCO INPUT is internally held at this voltage.
  - 3.5. Linearity
    - <  $\pm 10\%$
  - 3.6. Input impedance
    - > 100 k $\Omega$
  
- 4. INPUT POWER (PIN = "+VDC")
  - 4.1. Voltage
    - +5 V  $\pm 5\%$
  - 4.2. Current
    - < 600 mA @ turn on
  - 4.3. Steady state
    - < 1.2 Watts @ +25°C
  
- 5. ENVIRONMENTAL
  - 5.1. Storage temperature
    - 40°C to +85°C
  - 5.2. Vibration (non-operating)
    - MIL-STD-202, Method 201 (0.06" Total p-p, 10 to 55 Hz)
  - 5.3. Shock (non-operating)
    - MIL-STD-202, Method 213, Test Condition J (30 g, 11 ms half-sine)
  
- 6. RoHS
 

All units supplied under this MODEL NUMBER are RoHS compliant.
  
- 7. MECHANICAL(Outline drawing)
  - 7.1. Applicable series
    - OCXO 145 series
  - 7.2. Model number
    - OCXO 145-1001
  - 7.3. Outline drawing
    - 125-634



	OUR PERFORMANCE	MODEL NO.	PAGE OF TOTAL		DWG. NO.	REV.
	YOUR REPUTATION	OCXO 145-1001	2	2	114-1479	-

(VIEW FROM TOP)

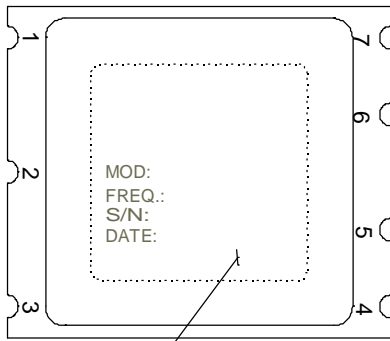

MARKING THIS SURFACE


MARKING





PIN CONNECTIONS

PIN	FUNCTION
1 (See Note 1)	VCO INPUT or NOT CONNECTED
2 (See Note 1)	REFERENCE VOLTAGE or NOT CONNECTED
3	+VDC
4	R. F. OUTPUT
5 (See Note 1)	OVEN MONITOR or NOT CONNECTED
6	0 VOLTS & CASE
7	0 VOLTS & CASE

Note 1. If the specification does not specify parameters for either PIN1, PIN2, or PIN5 then that respective PIN is NOT internally CONNECTED.

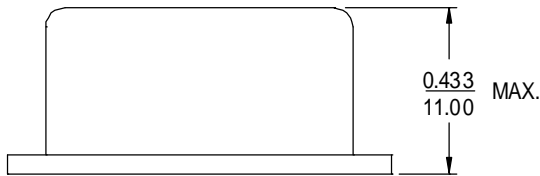

RECOMMENDED SOLDER PAD LAYOUT

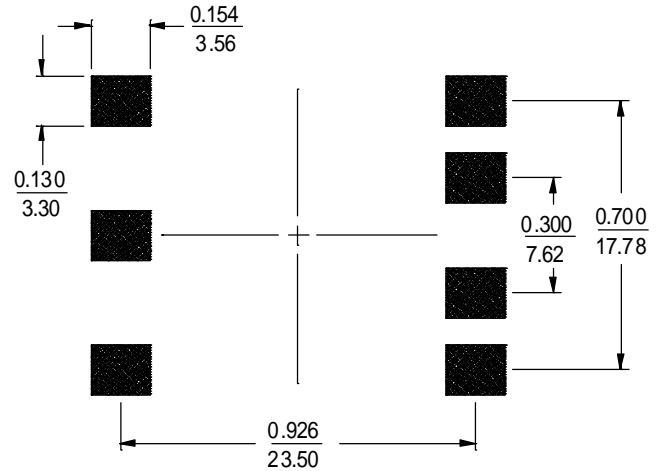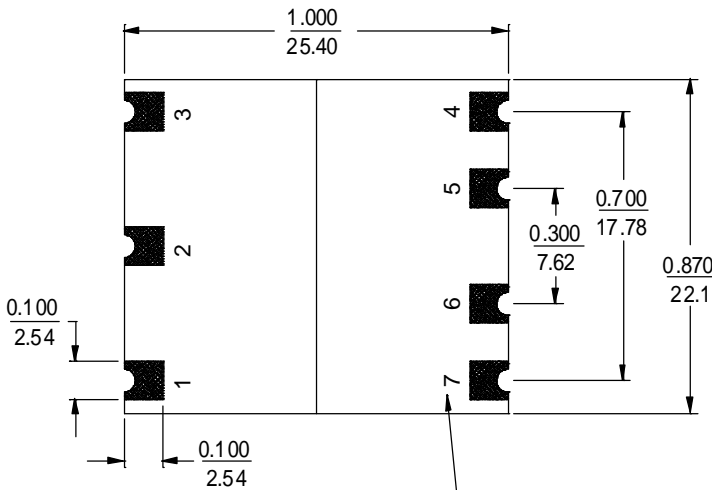

INCH  
mm (REFERENCE ONLY)

Form NO. 120-081E



OSCILLATORS

Charlottesville, Virginia USA

NAME: OUTLINE DRAWING  
(OCXO 145 SERIES)

CODE I.D. NO.  
**31785**

SCALE: 2:1  
DWN. BY: BTG

DATE: 01-30-2008  
APPR'D. BY: TST

A	MAX HEIGHT WAS .500/12.70	BTG	JRD	03-03-2008	<b>TOLERANCES</b> UNLESS OTHERWISE SPECIFIED: ANGLES: ±1 DEGREE FRACTIONS: ±1/32 INCH DECIMALS: .XX ± .015, .XXX ± .010 INCH <b>MATERIAL: STEEL</b> <b>FINISH: NICKEL</b> <b>MARK: LABEL</b>
B	MAX HEIGHT WAS .472/11.99	BTG	TST	10-21-2010	
LET	REVISION	BY	APP	DATE	

DWG: 125-634  
REV: B  
SHT: 1 OF 1